



PCT/GB 2004 / 0 0 0 5 1 3



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 11 MAR 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Dated 3 March 2004

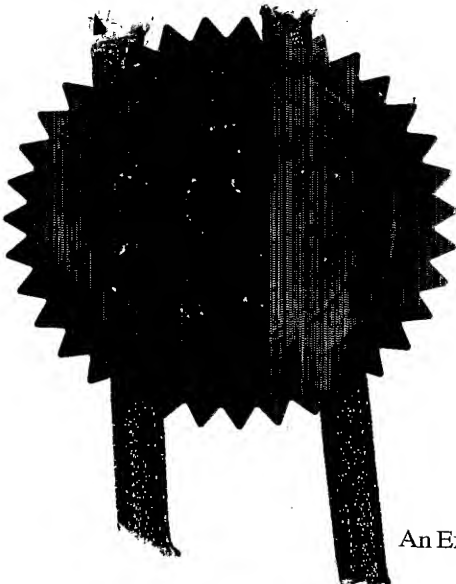

An Executive Agency of the Department of Trade and Industry

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference P3139 GB PRO.

2. Patent application number 0302926.1
(The Patent Office will fill in this part) 08 FEB 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames) Grex Games Limited,
Rod Cottage, Clay Lane, Nr Storrington, W Sussex RH20 4HL

Patents ADP number (if you know it) 08562324001

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention System, Architecture and Engine for Massively Multi-User Operation

5. Name of your agent (if you have one) NOVAGRAAF PATENTS LIMITED

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

THE CRESCENT
54 BLOSSOM STREET
YORK YO24 1AP

Patents ADP number (if you know it) 08299166001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
--	---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)
---	-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or yes

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 27

Claim(s)

Abstract

Drawing(s) 1 + 1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patent Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Novagraaf Patents Ltd

Date

NOVAGRAAF PATENTS LIMITED

7.02.03

12. Name and daytime telephone number of person to contact in the United Kingdom

01904 610586

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

**SYSTEM ARCHITECTURE AND ENGINE FOR MASSIVELY
MULTI-USER OPERATION**

- 5 The present invention relates to a system architecture and engine for a massively multi-user operation with which it is capable of performing an operation involving users at remote locations by using a network such as internet or satellite cellphone network, and an operation server capable of executing the operation, the method for massively multi-user operation, a user
10 terminal therefor, data files comprising data and statistics generated from the operation, and a machine readable medium comprising software therefor including a storage medium storing an operation program capable of executing the operation method.
- 15 The present invention addresses a market need to coordinate internet gaming interaction. Traditionally internet games operate with use of a user pc which displays information to the player and a gaming server or "engine" which runs and co-ordinates the game. Important performance features in playing a good internet game are speed of response to any move, also termed low latency, and
20 accuracy of response, ie not losing player moves. In certain games it also enhances the game effect by playing with many players and these are termed massively multiplayer on-line (MMO) games.
- 25 Players in a multiplayer game provide entertainment for each other, through social interaction, and challenging competition. This has proved to produce highly addictive gameplay, in addition to infinite variety in the end-user experience.

The problem with providing such games is the massive concurrent data transactions taking place, which impose high memory and speed demands. Indeed in such games, in the event of too many players logging on to play, not only will response speed slow to lose the game effect, but it is possible that the
5 server becomes overloaded and crashes. The operating system for such games may need to handle player interactions or events hundreds of times per second, regardless of triviality or complexity of the event. Generic approaches can be applied to simplify some event calculations but in some cases specialised code must be invoked to handle event calculations.

10

For example various solutions exist whereby the multiplicity of users to be notified can be minimised and the field of influence of any particular 'game play event can be minimised, which dramatically reduces the scale of concurrent data transactions required. For example in the instance of a map –
15 based game, it is known to divide the map into sectors or segments and to allocate a sector to each server in a game. The server then only handles that proportion of game events which take place in its sector and only notifies those players present in its sector. However it is not always possible to draw divisions such that servers can work truly independently. If a game event
20 occurs at a sector interface, or if a player is positioned at an interface, the servers can no longer be independent. In this instance, either the server boundaries must be shifted or the two servers must be synchronised to process in parallel and to talk to each other to make sure that one server has not got ahead of another. This causes a chain reaction and server failure, servers lose
25 messages as the time taken to send is too great, the server tries to send more messages to make up for the lost messages and this compounds the loss, resulting in the server being overloaded and crashing. A poor solution to this is to place obstacles on boundaries preventing players operating in these areas, and this reduces the visual effect and the real scale of the game.

Another solution to support an internet game for more than one thousand or several thousand players is to provide a system comprising more than one server each having capacity of up to 1000 players. A system designed to support over 1000 players simultaneously per server is the Everquest system. However in an effort to simplify the problem of massive concurrent play this system in fact supports a number of games run in parallel, each on an individual server and is not a truly massively multiplayer game. This imposes a serious limitation on the consequences for gameplay. Similarly the system Asheron's Call seems to allow around 1000 players per server in order to maintain significantly more than a minimum level of performance.

There is at present no universal solution to these problems, there are several solutions, most of which work for some of the time but none working for all of the time in all cases.

Although hardware upgrades are constantly available which increase capacity, upgrades are not capable of providing the capacity increase which would be required to support a game with a million players.

It is an object of the invention to provide a system which is able to support a single massively multi player on-line (MMO) game for up to a million players and which is not simply made up of hundreds of games running in parallel.

It is a further object of the invention to provide an adaptable and flexible system to support an MMO game which can be modified and tuned to support all game types in most efficient manner, enhancing accuracy of play and reducing latency.

It is a further object of the invention to provide a system to support an MMO game which allows games to be played without loss of game messages.

5 It is a further object of the invention to provide a system to support an MMO game which provides a high level of security and is resistant to hacking or cheating.

We have now surprisingly found that a MMO game may be provided for up to a million or more players in real time and with certainty of game play for all
10 users by providing a modular support system for an event driven operation comprising a processor farm which is to be accessible to a plurality of different users at the same time via a network registration for example having a log-on address, in which a plurality of processors are arranged in modules and in which events to be calculated are classified into modular groups of
15 events, each processor performing an assigned event and one processor, or groups of processors operating in dynamic collaboration, performing a modular group of events wherein the farm includes one or more load balancing processors which determine the allocation of events at any given time, deal with individual requests of processors for access to information, and
20 direct transfer of data or software required for calculating events to ensure that each processor is load balanced and is performing its calculations in most efficient manner.

There is therefore provided according to the present invention a system
25 architecture for a massively multi user operation requiring massive concurrent data transactions comprising in a modular networked system of servers and of network services:

a plurality of operation servers

one or more load balancing servers

- a network connection connecting operation and load-balancing servers
- a network address for user registration / log-on from user terminals
- a network connection for connecting to user terminals and allowing event instructions to be transmitted to the system and event messages to be returned
- 5 to the users
- a plurality of file structures / datasets relating to the operation and events
- a plurality of memories for storing data relating to the operation and events a plurality of file structures / datasets relating to a register of servers and a register of users
- 10 a plurality of memories for storing data relating to a register of servers and a register of users, and
- a plurality of services in the form of expert systems including:
 - one or more load balancing expert systems having access to a register of
 - 15 servers and a register of users, adapted to monitor operation server load and division of services and data on individual operation servers and direct transfer of data, files, services or events between servers in order to facilitate and simplify calculations requiring data access and/or transfers, and to distribute server load to meet capacity of any given operation server;
 - 20 one or more user ambassador expert systems providing a confidential user interface, transmitting user requests and communicating results to individual users and operating on individual network protocols for each individual user;
 - 25 one or more service expert systems adapted perform calculations relating to an event;
 - one or more user solution definition or solution selection expert systems adapted to apply at least one solution or to select at least one solution, and

one or more event expert systems adapted to calculate events to determine users affected by each event and subsequently to compute the effect thereon, forward an event message to each user ambassador of affected users and
5 implement the event.

The system architecture of the invention provides a Service-balancing system, where not only are the requests balanced amongst servers, but expert systems and services running on the servers is itself mobile, and moves from server to
10 server to accommodate changing usage patterns, whereby memory requirements and computing requirements are minimised, event computation time and reporting are substantially real time and latency is minimised.

This service – balancing system increases both performance and reliability. If
15 the data needed to answer a request from a user is spread across three different servers, then a huge overhead is required to gather that data and present a single response to the user. If the data can automatically move itself around, so that related data congregates together, then the overhead disappears. This is clearly faster, but because it is also more reliable - systems usually crash when
20 they become overloaded - this design enables the system to respond to an imminent overload by dynamically re-configuring itself in the most appropriate manner, faster than any human could spot the problem and attempt to manually reconfigure it.

25 Preferably the network connection for connecting users is from the user to the user ambassador and is not accessible to any other part of the system, and the network connection for transmitting event instructions to the system and receiving reports is from the user ambassador expert system to the server farm.

The present invention provides a modular system providing artificial intelligence in a number of different expert systems each of which perform very simple calculations but in very large numbers and at very high speed, and additionally which interact to provide a complete operation. These expert
5 systems are essentially pieces of code which accept requests and generate reports in answer.

The expert systems of the invention have been developed in which complex reasoning calculations are performed on large numbers of "facts", for example
10 for calculating the location of a user or his line of sight or sound at any one time. These reasoning operations may involve the performance of complicated mathematical calculations on the "facts" which the expert system is to respond to, in order to provide the required location or event message output for information or control purposes. Preferably calculations are classified by event
15 whereby each expert system performs one type of event driven calculation and thereby becomes faster and more proficient with uninterrupted repetition of this calculation.

Reference herein to an operation is to any operation wherein a user operating a
20 terminal joins an operation on a processor or server, such as a board game, gambling game, locating game or service, training game or system, teaching system, dating match service, introduction service, shooting game, battle game virtual reality game etc. Reference herein to a "terminal" is to devices or "platforms" connected to a network and accessible to servers, such as personal
25 computers, consoles such as Playstation™, hand held devices, mobile phones and the like.

Preferably ambassador expert systems comprise a network protocol defining the user terminal whereby the ambassador does not need to question the user

on his terminal constraints in order to send reports or messages. Preferably the system architecture provides a dedicated ambassador expert system for each user and for each access terminal or platform for each user, for example for a user connecting from a pc or Playstation™ and also from a mobile phone. The ambassador is therefore able to base its assessment of users game play and reporting on its protocol knowledge. Preferably the protocol gives precise terminal design and constraints, specifying all things that the terminal can do and how to communicate. Accordingly the invention provides a multi-platform network support system for operations such as on-line games (MPNGs) and the like as hereinbefore defined.

Reference herein to an event is to a transformation from one set of operation circumstances to another. In a particular advantage of the invention an event is created to change anything in any operation run by the event-driven system of the invention.

The techniques of load balancing and server failover are known techniques which have been used in other applications in the past. Webservers use a dedicated computer which decides which server is to carry out a task and allocates the task, in response to a task request specifying certain needs. The task allocation "layer" decides which server on the entire network is most suited to performing the task and returns the result with the appearance that the task has been performed by the layer itself. The user only has to memorise one web site, for instance, and load-balancing at the company site automatically shares requests to that address amongst many servers. For instance, Google supports millions of requests per day, far more than any single computer could manage: the Google website is in fact many hundreds of servers pretending to be one.

Although load balancing is not known as such in MMO it is known in MMO support systems or engines to distribute a game across different servers and to calculate each game sector on the server responsible for that sector. An amount of server – server communication is required if an event in one server sector impinges on an adjacent sector, for example if an event occurs at a server boundary. In this case typically one server requests access to data relating to the adjacent server boundary in order to calculate the event message. However each server works more or less independently. In the case of server overload a new server is introduced to allow the overloaded server to spill over onto the new server.

Instances of true server – server interaction have neither been considered for use in MMO systems nor been able to be incorporated since the MMO systems to date are not truly modular and therefore the task allocation required for functioning server failover and load balancing has not been possible.

The present invention extends the concept of load balancing as known in the art, since the known concept could not meet the massive concurrent data demands envisaged in the present invention. In the present invention the load balancing server directs not only task allocation but directs data transfer and transfer of expert systems and other software to change server competency for a more efficient operation with lower latency.

The load balancing expert system of the invention is very simple and therefore universally applicable. In the system of the invention servers comprise an identifier or tag and servers are aware of their own identity. Servers also comprise a list of all responsibilities in terms of responsibility for the entire operation map or a subset, cell or grid thereof, which is comprised in a register of server responsibilities and is accessible to the load balancing expert system.

The load balancing expert system presents to each operation server a set of questions on relative desirability of any items in a list of event tasks to be allocated and each server grades these for example from -1.0 to +1.0, and modifies this grading with time. The load balancing expert system also
5 questions every server on its throughput and latency, receives replies and decides whether there is a need to reduce the load on any given server, looking at the list of responsibilities and using heuristics to sort by undesirability, selects one and offers it to a server reporting high desirability or to a server which is least heavily loaded.

10

The present invention provides for integrated server clustering and handover by means of the one or more load balancing servers being apprised of individual and module server load at any one time and being competent to direct communication between servers, including not only communication of
15 data but the transfer of data where this will speed up the interaction between server and data or where the need for data by the host server is less than that of the requesting server, and also the transfer of expert systems and task responsibilities or services where these become more appropriate to another server or can be more efficiently operated from another server.

20

Preferably the load balancing expert system compiles server clusters or modules so that all expert system and data needs are local to a module and services needing the same data are local to a module. In the event that two solutions apply, these are dealt with in separate parallel algorithms, thereby
25 maintaining linearity. Parallel linear-algorithm expert systems are operated in a module cluster whereby they are able to access common information and data and are therefore always operating on the same dataset, in the event of a change in operation circumstances. In a particular advantage of the invention data is not duplicated throughout the system, which can lead to

inconsistencies, conflicts and operation errors. The load balancing expert system of the invention allows modules or systems operating parallel algorithms and requiring access to the same datasets to be assigned to the same server or server module whereby they are able to directly access the data without the need to make copies, and without the need for time and capacity consuming data requests or transfers requests. In a particular advantage the use of expert systems operating parallel algorithms ensures that the operation is readily scalable without system overload.

The load balancing expert system may migrate two interdependent event tasks or expert systems to the same server. For example in a map based operation one server SA is competent for a quarter of the map and another server SB has access to data about people on the map. Traditionally the server SA would request access to data on SB. In the system of the present invention SA asks for data migration and inter server "chatter" is therefore minimised, efficiency increased and latency further reduced. The server farm of the invention therefore operates as a virtual single server or cluster of virtual single servers.

Preferably each module has a limited independence whereby it is interdependent with other modules, and groups of modules may be completely independent. This provides additional advantages in terms of dynamic join/leave semantics, allowing servers to be uploaded and hotswapped for upgrading, modifying and live updates, and also allows any module or a set of modules that perform particular tasks to be replaced with little effort.

Although it has been known in the past to group servers so that overload of one server spills onto the next server in the group, a modular approach has not been used as such.

Preferably the load balancing expert system(s) coordinate and distribute events and event calculations between operation servers and provide general resource management.

- 5 The modular system of the invention enables provision of a user interface (API) split into thousands of modules as opposed to the tens of modules known in the art.

10 In a further advantage of the invention the modular approach allows a scalar allocation of competency. In any event calculation a server CPU communicates with the hard drive, RAM and Cache 1 (very fast RAM) and Cache 2, as well as floppy disc and a networked server or terminal. Code is written so that each expert system performs one task over and over without deviation. By a scalar allocation one server has competency for locating an event to a global accuracy and hands over to the next server which has a
15 competency for locating to a regional accuracy, which in turn hands over to a server which is competent to local or pixel perfect accuracy. This last server can access the Cache 1 memory to locate an event as it requires the minimum in data. By a scalar task allocation of this type all tasks are addressed in terms
20 of their needs in terms of memory, data access etc and are then allocated to a server providing the required competency, thereby avoiding wastage of memory or data access time.

25 Preferably each expert system in the system of the invention is developed around a key algorithm which is substantially linear having regard to the relation to events and users. Hence an event may be related in a linear algorithm to a finite group of users and event messages may be reported to the same or a different finite group. This differs from a power algorithm or multiple dependent algorithm in which an event generates a query amongst all

users to determine the effect on each and in turn the messages are reported to all users, which is the case in a truly multi interactive system. For example in the case of a power algorithm, for a small number of users the multiplicity of 10 events communicating to 10 users is 100 communications. In the case of a million users each generating events this quickly becomes 1M events and 1M users which equals 1×10^{12} communications. In the case of a linear algorithm, this could be reduced to 1M events each being communicated to different sets of 10 - 200 users, giving a total of 10M to 200M communications with exactly the same visible effect to the users as in the power algorithm system of the prior art, indeed giving a superior visible effect in terms of accuracy and reduced latency.

Some linear algorithms suited for use in the system of the invention are known and some are novel. Indeed it is known to apply one algorithm type, line of sight, in an internet game. It is also known to apply another algorithm type, quadrant method in an internet game. However it is not known to provide dynamic algorithm selection in an internet game, whereby an algorithm suited to the prevailing dynamics of the operation is selected and applied, for a suitable period until such time that the operation dynamics become unsuited to that algorithm and an alternative algorithm is selected.

A solution selection expert system as hereinbefore defined comprises a linear algorithm which performs an initial solution selection which determines the nature of an event and assesses the state of the operation in play, makes a set of assumptions in order to assess the means by which users will be affected and selects a solution to limit the impact of the event to a reasonable number of users, whereby non affected users are not considered in the calculation of event message. Preferably assumptions are selected from a number of predetermined assumptions, such as shadow, line of sight, locality, terrain etc.

This means that update information which relate to an event need only be applied to an operation subset in most cases and need not be applied to the entire operation set, ie the entire operation "world". This solution selection algorithm preferably operates on a binary selection applied to the entire operation, certain users or a subset, and eliminating invalid solutions, for example if a large explosion takes place it is not possible to limit by range, if an audible event takes place it is not possible to limit sound by line of sight etc. The system may for example operate 100 shadow expert systems and 2 line of sight expert systems at a given time, and the load balancing server present in the system can specify that an event message be delivered to a solution of either type or even to a specific solution expert system or server competent for that particular solution expert system if the data access needs are known.

15 Preferably the load balancing expert system of the invention comprises data relating to the entire operation and to subsets thereof and monitors the prevailing solution efficiency. On detecting a decrease in efficiency it automatically selects and directs a change in solution for any given server and any given service on any given server at any given time whereby one solution
20 is replaced by the directed solution.

Preferably linear algorithms which may be selected for dynamic solution selection in an operation according to the present invention include line of sight, shadow, quadrant, scalar, range, grid, etc and additionally include any
25 solution which is selective to a dataset which is identified in and recorded in the system architecture.

The modular system of the invention provides each user with an ambassador that is able to coordinate event messages from multiple events, coordinate

related event messages from one event, such as sight and sound messages, and combine the modular event messages as a complete event message. In a particular advantage of the invention the event message is reported to each directly or indirectly affected user ambassador to validate the message, and
5 authorise its implementation, and report to the user.

In a further advantage the user ambassador expert systems are intelligent, whereby they are associated with and are able to access memory banks and datasets relating to the user in question and assess whether an event message is
10 feasible having regard to the user and his competence. By this means invalid messages may be detected and queried. This has the result that accidental or fraudulent relay of incorrect information to a user may be prevented ensuring the accuracy and quality of the operation, and ensuring that no information
15 leakage can take place which could present an opportunity for an operational cheat, either by hacking to modify a users limitations for example, such as personal vision limitations, or by running two users on adjacent machines to increase his field of view etc.

In a further advantage the user ambassador expert system provides for user-
20 user communication directly or via intervening respective ambassadors. Direct communication may be in the form of chat rooms, auctions etc.

In a further advantage the modular system of the invention in combination with the ambassador expert system provides for independent reporting to
25 users, and this has the advantage that servers do not have to wait for each other and that reporting and implementing event messages is not held up in the case that event calculation for one or more users is borderline and thereby protracted. This has the additional advantage that in the case of server overload or high server latency the server can drop borderline calculations

reducing load and thereby maintain efficiency and reduce latency on direct event message reports. Traditionally in order to prevent conflict servers cannot access data at the same time but need to share access in sequence, and to provide a guarantee of message delivery servers are not able to report at the same time. The present invention characterised by a user ambassador service on dedicated servers enables both simultaneous reporting and provides an alternative mechanism for delivery guarantee. Additionally the ambassador provides a final judgement on event message in borderline cases. The present invention moreover provides faster and more efficient event calculation which reduces conflicts as all servers complete tasks in less time.

Additionally the ambassador expert system may comprise a complete local dataset record of the entire operation as acknowledged received by the user, whereby any unsent messages can be detected, as a discrepancy with the operation status at any time, whereby the ambassador simply sends the next message with the omitted message to update the user. Traditionally internet systems keep sending a message until an acknowledgement is received which means that message delivery delays get compounded by repeat sends and latency is increased. The system of the invention avoids increases in message sending and thereby avoids increase in latency.

In a further advantage of the invention the modular system provides expert systems for dataset generation using spare system capacity at any time, generating iterative dataset calculations relating to the prevailing operation which may be applied to solution calculations further enhancing linearity. The load balancing expert system questions servers on unused capacity and authorises dataset calculation whereby it is able to direct access to those datasets in subsequent requests for information to support event calculations. For example spare server capacity may be used to generate information and

derivative maps for a map-style operation, which represent the operation in terms of shadows, and lines of sight visible from multiple co-ordinates, whereby shadow or line of sight event messages of an event taking place at any one such co-ordinate is instantly directly calculated using such dataset,
 5 without needing to first calculate the shadow or line of sight subset.

Preferably the system comprises modular datasets representing the operation whereby it is possible to update the operation in respect of selected data only without the need to update an entire operation dataset. For example a game
 10 board may be represented by layers of information maps presenting sentient, non-sentient objects subclassified by permanence, for example as a dataset to the geological formations, dataset of vegetation, dataset to buildings, dataset to roads, tracks etc, dataset to human activity or animal activity, dataset to magic power zones, dataset to psychic events, dataset to objects impermeant to
 15 psychic events, such as lead objects etc. Additionally derivative datasets or maps may provide data on paths between sentient objects such as buildings, furniture in a room etc, without the need to show the intervening buildings and furniture, may show height datasets or maps, gradient datasets or maps etc.

20 Traditionally games have a real map and a selection of derivative maps showing certain features. Preferably the system of the present invention provides datasets relating to derivative maps only whereby update information does not need to be duplicated to a real map and whereby algorithms relating to the operation can recognise all derivative maps universally by coordinate.
 25 Thereby they do not need extra code to recognise a real map or vice versa.

In a particular advantage the modular datasets of the invention including derivative maps provide a greater number and variety and intricacy of available solution selection methods to determine event message. Datasets

may be presented as code, algorithm, coordinate, 2D, 3D, derivative etc. Datasets may be modified by the operation provider or by users, with different security levels for modification access.

- 5 The system of the invention may be operated with any necessary number of servers and processors depending on the desired scaling and modularity. Reference herein to servers includes individual servers and future modifications thereof including servers linked to operate as a virtual unitary server, with data migration in to all the component servers. Preferably servers
10 include modular layers or levels hosting various systems and services as hereinbefore defined, levels being distinguished by networking, access, competency level, RAM access etc.

- The system may also be operated on any desired network bandwidth. It is an
15 advantage that the modular system of the invention enables low bandwidth usage per user which helps to reduce costs and increase user capacity.

Preferably the system also incorporates a neural network for pattern recognition in information and derivative maps.

20

In a further aspect of the invention there is provided a method for hosting or using a massively multi-user operation as hereinbefore defined.

- In a further aspect of the invention there is provided a user terminal for
25 networking to a massively multi-user operation system architecture as hereinbefore defined.

In a further aspect of the invention there is provided a user interface for interfacing to a massively multi-user operation system architecture as hereinbefore defined.

- 5 In a further aspect of the invention there is provided a datafile for a massively multi-user operation system architecture as hereinbefore defined selected from an event log, user data information, information map, derivative map and the like.
- 10 In a further aspect of the invention there is provided a datalog for classification of events by all features, given as snapshot or historical record. This may be used for any suitable purpose. One such use may be for corruption security etc.
- 15 In a further aspect of the invention there is provided a dataset of rules by which the system determines precedence of conflicting event messages for a user, for example whether a user has evaded starvation by some means etc. Rule datasets may be changed with universal effect as desired.
- 20 In a further aspect of the invention there is provided a machine readable medium comprising system architecture software for a massively multi-user operation as hereinbefore defined.

25 In a further aspect of the invention there is provided a method for controlling and directing the development of an operation to be supported by the system of the invention, with the use of the system of the invention as a development means. The arduous processes of tweaking game content to provide even, well-balanced gameplay can take many months – in some cases, years. Each new rule has to be tried out in conjunction with all the others, and tested to see

if it e.g. makes a certain weapon too powerful. Currently, this process can only be done by trial and error.

5 Because the number of possible scenarios (i.e. the combinations of all the different pieces of content) is vastly greater than the amount of content, they exhibit "emergent behaviour". I.e. there are many situations where things happen that the designers didn't predict, as a result of the complex combinations of many simple pieces of content.

10 The system of the invention allows designers to control and direct the emergence of different behaviours directly, automatically checking all possible outcomes of all scenarios if a certain change were made to a certain game rule. This enables the identification of "absolute rules" that may be imposed and cannot be avoided, enabling developers to identify undesirable situations, and with a few lines of code prevent them for ever. For example no
15 matter what new rules may be introduced, any time the emergent behaviour would contravene an absolute-rule, the system overrides it automatically. This provides unprecedented power to developers, enabling them to produce much more complex games with the same resource cost, and also prevents many previously unpredictable bugs and security holes before they sneak into
20 production-code and cause major problems.

In a further aspect of the invention there is provided the use of a known or novel linear algorithm or known power algorithm modified in novel manner to a linear algorithm in the system of the invention as hereinbefore defined.
25

In a further aspect of the invention there is provided a novel linear algorithm for an expert system as hereinbefore defined, in particular for a solution as hereinbefore defined or hereinbelow illustrated.

In a further aspect of the invention there is provided the use of a known expert system in the system of the invention as hereinbefore defined.

5 The invention is now illustrated in non-limiting manner with reference to the following figures and examples.

In the figures

Figure 1 illustrates the modular server system of the invention with modular expert systems.

10

Example 1 – Server Handover

Server 1 is responsible for a sector of the game map, and Server 2 is responsible for an adjacent sector, Server 1 also hosts Player A's user ambassador and is responsible for calculating all activities relating to Player A. Player A moves into Server 2's sector and Server 1 requests access to information on Server 2's sector. The access request is transmitted to load balancing server X which determines that the activities relating to player A can best be calculated by Server B, and dictates migration of the Player A user ambassador service to Server B.

15
20

Example 2 – Game map operation

Game Scenario : A map game operation is run for a period of time with multiple players each operating independently. After a time one player gains popularity and starts to draw a following. This influences the game dynamics such that other groups form and the game dynamics change from individual to group dynamics. The expert solution selection system therefore selects an appropriate solution from the following known and novel solutions and

25

instructs servers to operate the necessary expert system solution in respect of some or all users and in respect of some or all of the game play:

Example 2 - linear algorithm solutions

5

In the above game scenario players are simultaneously creating events selected from seeing, doing, walking, shooting, talking etc.

In the case of a small number of players the multiplicity of 10 events per second communicating to 10 players is 100 communications per second. In the case of a million players each generating events this quickly becomes 1M events per second and 1M players which equals 1×10^{12} communications per second. In the case of a linear algorithm, this could be reduced to 1M events each being communicated to different sets of 10 - 200 players, giving a total of 10M to 200M communications with exactly the same visible effect to the players as in the squared algorithm system of the prior art, indeed giving a superior visible effect in terms of speed and accuracy.

15

Example 2a - Solution Selection - line of sight

Line of sight solutions are known in other fields of computing. Line of sight calculations now need to be carried out on more objects, whereby it is necessary to determine whether a group member can see or be seen by any of another group members instead of simply by another player.

20

Example 2b - Solution Selection - shadow

25

As an alternative to line of sight selection, shadow selection, also known in other fields of computing, allows whole quadrants or sectors of a map game to be blocked out, shielded by large objects.

Shadows may encompass an entire group as readily as an individual and hence this solution gains importance for selection.

5 Example 2c – Solution Selection – quadrant

Information maps present the world in quarters, then in subquarters of each quarter, repeatedly refining by further subquartering. A server carries a particular set of subquarters, depending on number of servers. However this
 10 server continues only to operate on this quarter principle and will not apply a different solution should it become more efficient, for example if all users move to only 3 subquarters and vacate 37 subquarters. In that case one or two servers will carry all users and all event calculations, and will neither migrate quarters nor users.

15

In the system of the invention is then possible to confine an event or user or an event message to the smallest quarter to which the noticeable radius of that event extends and to only communicate event messages to all sentient objects in that quarter.

20

A global event would be communicated to the entire "world" whilst a regional event having diameter n would be communicated only to users in subquarters containing the diameter n , and a local event having diameter p would be communicated only to users in subquarters containing the diameter p .

25

If the event or user does not move between subquarters it is not required do not need to update the location data, and possible therefore simply to select the smallest scale quarter in which the event range or user move is contained and operate with that dataset.

Groups may spread over an area, whereby a group may easily fall over a quadrant border, which was less likely to be the case with an individual, this solution becomes less convenient and is deselected.

5

Example 2d – Solution Selection – sets and subsets, locating

A known solution is to provide information maps relating to the world in quarters, then for subquarters for each quarter, repeatedly refining by further subquartering. It is then confine an event or player or an event message to the smallest quarter to which the noticeable radius of that event extends. It is then possible to only communicate event messages to all sentient objects in that quarter.

15 A nuclear bomb would be communicated to the entire “world” whilst a small explosion having diameter n would be communicated only to players in subquarters containing the diameter n , and a match strike having diameter p would be communicated only to players in subquarters containing the diameter p .

20

If the event or player does not move between subquarters do not need to update the location data, and can therefore simply select the smallest scale quarter in which the event range or player move is contained and operate with that dataset.

25

In the solution of the invention the server is able to communicate with other servers for other information access, for service migration and other requests, and is also able to communicate with the user ambassador for event message verification for a more accurate and realistic game. Should the allocation of

subquarters to servers become inefficient the load balancing server directs migration of subquarters or players.

Example 2e – Solution Selection – range

5

A nuclear bomb would be communicated to the entire “world” whilst a small explosion having diameter n would be communicated only to players in subquarters containing the diameter n , and a match strike having diameter p would be communicated only to players in subquarters containing the diameter

10 p.

A group may be out of range of an event as may an individual hence this solution gains importance.

Example 2f - Solution Selection – shields or weapons

15

A group may equip themselves with distinctive weapons or shields which are superior to or impenetrable to other individuals / groups, hence this solution gains importance

Example 2g – Solution Selection – grids

20

Grid solutions are also known in other fields of computing in relation to map scenarios. In this case the grid may be a classical square grid or in novel manner could be a pentagon grid, reducing the number of sectors at an interface. Grids may be superimposed and out of alignment allowing moving

25

to a different level grid to operate away from an interface or boundary.

Example 3 – scalar event calculation using grids

By a scalar allocation one server has competency for locating an object or user to a 10 metre accuracy and hands over to the next server which has a competency for locating to a 1 metre accuracy, which in turn hands over to a server which is competent to pixel perfect accuracy. This last server can
 5 access the Cache 1 memory to locate an individual as it requires the minimum in data.

Example 4 - dataset generation

10 Line of sight dataset: a dataset is prepared with spare server capacity calculating lines of sight relative to static objects from numerous coordinates, these are applied when the game reverts to line of sight solution. In order to complete the dataset, a server allocated with that dataset calculation accesses
 15 servers holding maps relating to regions through which each line of sight passes. In the course of operation a mountain is blown up and line of sight dataset is recalculated accordingly.

Example 5 – independent reporting

20 In a game in which 20 players can see an explosion, a further 10 player have their line of sight obscured by a building and can see the flash from the explosion and a further 5 players are the other side of a wood beyond the building and have their line of sight blocked by trees and may or may not be able to see the flash of the explosion, the calculations to determine event
 25 message for each group of players is of differing complexity. The event query is sent to 35 competent servers and 20 return a report of seeing the explosion in an instant, 10 return a report of seeing the flash an instant later and a further 5 are held up determining a complex geometrical calculation regarding their 5 players. A delay in reporting for these players is not unrealistic and depends

on how observant an individual is in real life. In this case the ambassador for each player can assist in verifying the event message in the knowledge of data regarding the user in question. In the case that a server is overloaded they can drop their calculation without hindering the other 34 players and with the result to their player that he has seen neither explosion nor flash

Example 6 – information and derivative maps

Information and derivative maps are known in other fields of computing. In this case the invention uses only derivative maps and no universal map, whereby all information is presented in modular manner allowing easy updating and easy calculation. Moreover each derivative feature which is the subject of a derivative map may be used as a solution selection option for any of the above or other known solutions.

Example 7 – mobile connection to internet game

A player having both mobile and internet connection requires two ambassadors. An event instruction may be sent via the mobile for example to buy a sword in a given price range, another player may offer a sword for sale via intermediate ambassadors or direct communication and a sale is negotiated and the result reported to the operation system. The system updates the game to give one player a sword and the other a pile of gold when the player next logs on.

